



프리미엄효율 (Premium Efficiency)

P Series 3-Phase Flange Mounted Type

1.5kW

SPECIFICATION


MOTOR

프레임 형번 Frame No.	출력 Output (kW)	기종명 Model Name	극수 Poles	전압 Voltage (V)	주파수 Freq. (Hz)	사용 조건 Duty	정격 부하 [Rated Load]					보호 등급 Degrees of protection	절연 등급 Insulation Classification	냉각 방식 Protective Cooling System
							전류 Current (A)	속도 Speed (r/min)	토크 Torque (kgf-cm)	역율 Power Factor(p.u.)	효율 Efficiency (%)			
90L	1.5	PPGF150- 2R4F□□	2	220/380	60	CONT.	5,65/3,25	3515	41,5	0,81	86,6	IP55	F	Totally Enclosed Fan-Cooled
		PPGF150- 2U6F□□	2	230/400	50		5,50/3,20	2915	50,0	0,79	84,2			
				460	60		3,00	500	48,5	0,82	86,6			
		PPGN150- 4R4F□□	4	220/380	60		5,90/3,40	1760	82,9	0,78	86,5			
		PPGN150- 4U6F□□	4	230/400	50		5,90/3,40	1470	99,3	0,72	85,3			
				460	60		3,35	1760	96,6	0,76	86,5			
112M		PPJL150- 6R4F□□	6	220/380	60		7,7/4,45	1175	123	0,6	88,5			
		PPJL150- 6U6F□□	6	230/400	50		7,1/4,1	980	148	0,6	82,5			
				460	60		3,75	1175	145	0,65	88,5			

- Note) • Foot(Leg) Mounted Type 과 Flange Mounted Type 제품은 특성이 동일합니다.
(Foot (Leg) Mounted Type and Flange Mounted Type have the same specifications)
- 전압 U6 모델의 실제 정격출력은 230V/400V 50Hz에서 1,5kW, 460V 60Hz에서 1,75kW입니다.
(Actual rated power for voltage U6 model is 1,5kW at 230V/400V 50Hz and 1,75kW at 460V 60Hz)

PE-F Type DIMENSIONS [Flange Mounted Type]

UNIT = mm

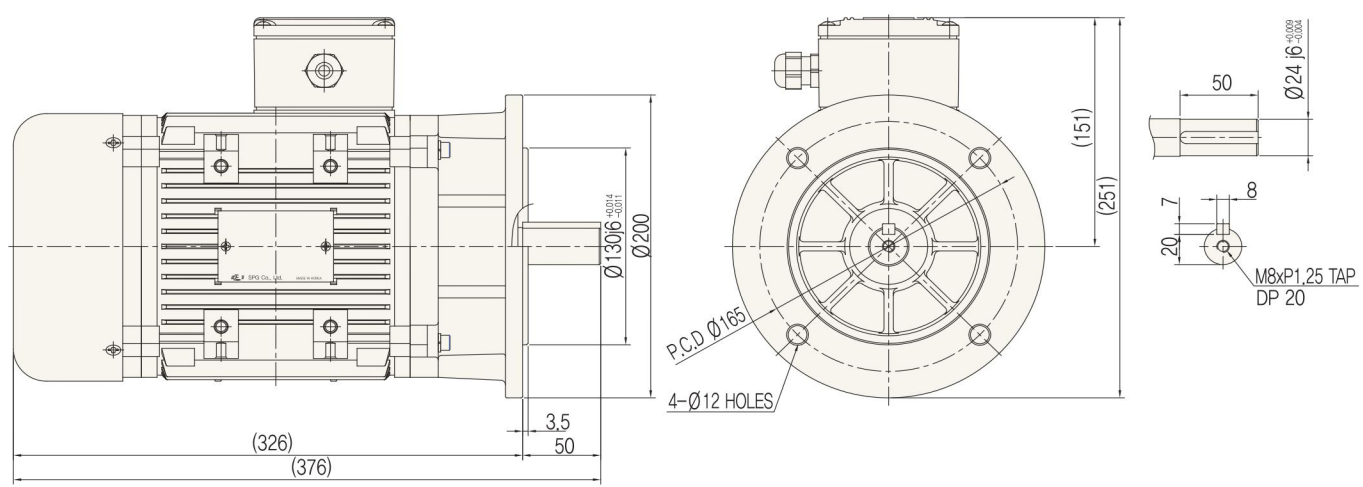

- Note) • 키 및 키홈 공차(Key and Key groove tolerance) : KS B 1311
- 출력축 ØD공차(ØD tolerance for output shaft) : KS B 0401

Bearing No.		Weight
Load	Unload	
6205ZZ	6204ZZ	19,5kg